


Combined Cycle HRSG Access Doors

Adjustable Depth
Insulation Pan
Can Be Adjusted
Plus or Minus 2".

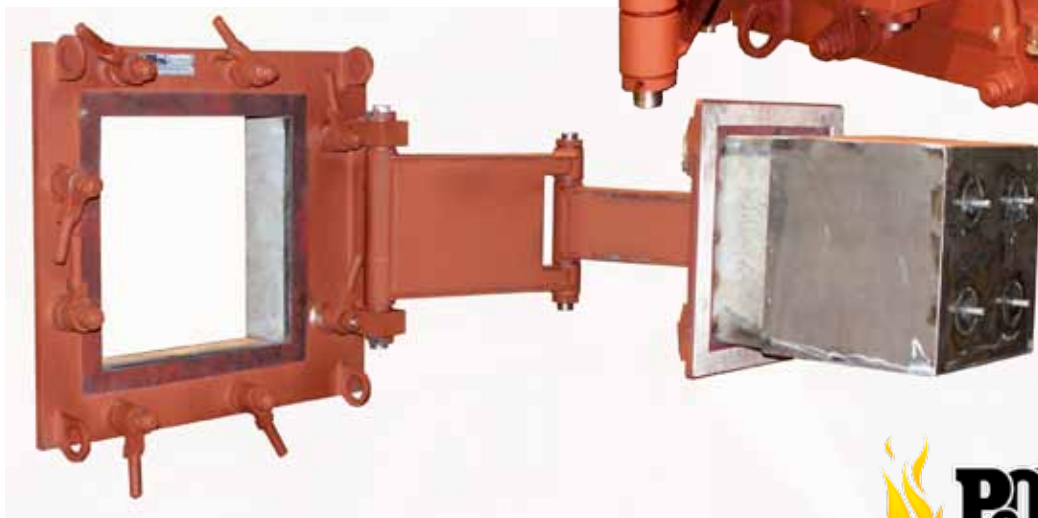

Key Benefits

- Any Size Available
- Fast Delivery
- Max Operating Temperature 1,800° F



**POWER
&
INDUSTRIAL**
SERVICES CORPORATION


800.676.7116

www.piburners.com

Combined Cycle HRSG Access Doors



Combined Cycle Utility HRSG

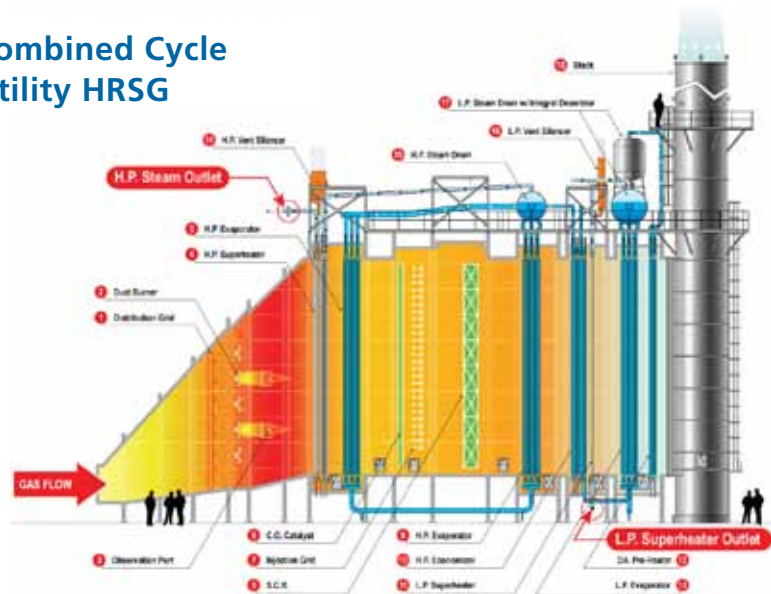

Features & Benefits:

- Any size available.
- Fast delivery.
- 1600°F Max. with 309L inner skin;
1800°F Max. with 253MA inner skin.
- Seals rated to 2000°F Max.
- Insulation depth from 4" and up [14" \pm 2" shown]
with field adjustment for variations in wall thicknesses.
- Double acting "Grasshopper Leg" hinges allow compact wall
footprint and to fully swing door away from the opening.
- Lubrication-free graphite-bronze bushings and
stainless steel hinge pins.
- Quick opening dogs with brass strikes provides gas tight seals
with easy adjustment as needed.



800.676.7116
www.piburners.com